


Technical Data Sheet

ProtecRSS Pre-Cut Cricket

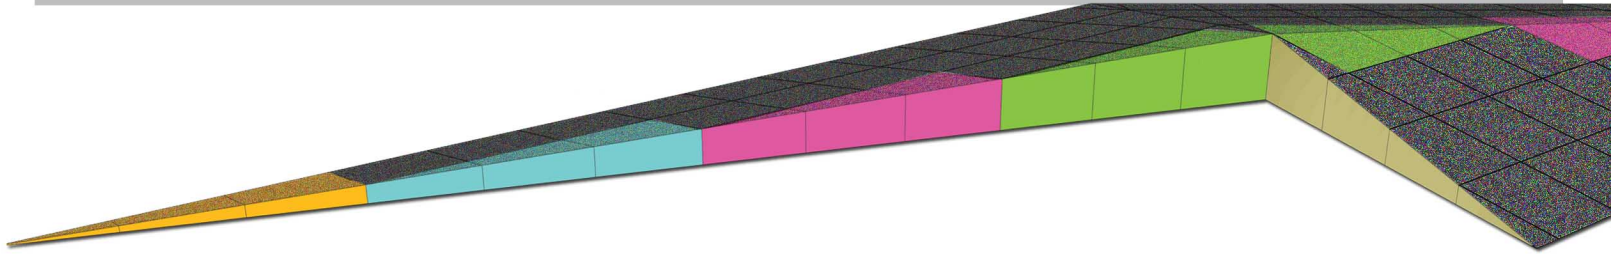

Description:

ProtecRSS Pre-cut Cricket is a combination of pre-engineered tapered and flat rigid mineral wool fiber insulation manufactured from basalt rock and steel slag, having a melting point of approximately 2150°F (1177°C), with a bitumen saturated and lightly sanded surface. The pre-engineered panels make up the various Starter Packs and Filler Packs required in easily and efficiently assembling crickets of any length.

Common Applications:

ProtecRSS Pre-cut Cricket is intended for cold applied, torched or hot asphalt modified bitumen or built-up roofing membrane systems in commercial and industrial roof applications to elevate low areas and allow for proper drainage. It can be installed with hot or cold adhesives, or mechanically fastened.

Dimensions:

1/4" (2%) Slope, diamond shaped 3:1 length to width ratio, up to 100' (30.5 m) or greater.
1/2" (4%) Slope, diamond shaped 3:1 length to width ratio, up to 100' (30.5 m) or greater.
Custom crickets available upon request.

Properties:

Actual density ASTM C 303 12.5 lb/ft³ (200 kg/m³)
Dimensional stability - ASTM D2126..... Linear shrinkage 7 days @ 40°F (-40°C): 0.00%
Moisture resistance - ASTM C209..... Water absorption <1.0%

Features:

• Torch safe/fire resistant • Made with recycled material • Excellent dimensional stability • Moisture resistant

Compliance:

• ASTM 726 (Thermal Insulation - Mineral Fiberboard); FM Approvals 4470 NCC – (Noncombustible Core) Rated Roof Insulation

Limitations:

Do not expose ProtecRSS Pre-cut Cricket by ModulR TS to weather during shipment, storage or installation. At completion of day's work, seal all exposed edges. It is not intended for use as a structural roof deck. To avoid damage from construction traffic and material transportation install adequate protective boardwalks over installed roofing materials to enable passage of people and products not limited to the roofing project.

ModulR TS Inc. reserves the right to change the above specifications without prior notice.

1-800-908-9899 / www.modulrts.com / contact.us@modulrts.com

Rev. Date: Dec 08, 2017